

Adaptable 24/7 commercial grade AV monitor with simple digital signage media player

Budget Friendly Professional Displays

These displays are designed to be a cost effective 24/7 commercial display solution. If your application calls for a commercial screen and budget is a major factor these displays are perfect.





450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.





24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.






Narrow Bezel



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.

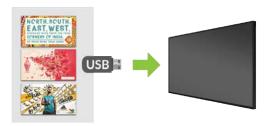


Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

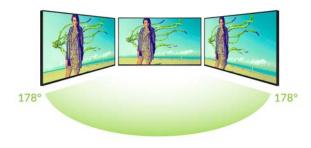

BNC Connection

Ideal for CCTV monitor applications our monitors have a BNC input for AV connections. The monitor is able to display video directly from CCTV cameras or from a Digital Video Recorder.




Built-in Video Matrix Processor

Automatically tile an external signal without the need for an expensive matrix box, creating a budget-friendly video wall solution.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.




Connect Devices

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.

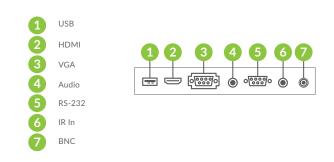

RS-232 Control and IR Extension

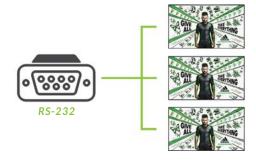



BUILT IN VIDEO MATRIX PROCESSOR


RS-232 CONTROL


NARROW BEZEL

CONNECT DEVICES

		32 Inch		
	Resolution	1920x1080		
	Display Area (mm)	698.4x392.85		
	Bezel Size (mm)	Top/left/right: 7.1, Bottom: 11.6		
	Pixel Pitch	0.12125x0.36375		
Panel	Aspect Ratio	16:9		
	Brightness (cd/m²)	698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110~240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920		
	Display Area (mm) 698.4x392.85 Bezel Size (mm) Top/left/right: 7.1, Bottom: 11.6 Pixel Pitch 0.12125x0.36375 Aspect Ratio 16:9 Brightness (cd/m²) 450 Colour 16.7M Viewing Angle 178° Contrast Ratio 1200:1 Speaker Type 2W, 4Ω (x2) Video HDMI, VGA, Audio Socket (3.5mm), BNC (AV Control RS-232 Power Consumption (W) 41 Input Voltage AC110-240V (50Hz-60Hz) Unit Size (WxHxD mm) 716.2x415.05x45.95 Package Size (WxHxD mm) 870x575x175 VESA Holes (mm) 400x200 M6 Net Weight (kg) 8.46 Gross Weight (kg) 10.79 Operating Temperature 0°C to 40°C Storage Temperature -10°C to 55°C Operating Humidity 10% to 80% Storage Humidity 10% to 90% Media Formats Video (AVI, MP4), Audio (MP3), Image (JPG, BN	16.7M		
	Viewing Angle	178°		
	Contrast Ratio	1200:1		
Audio	Speaker Type	2W, 4Ω (x2)		
۸۱/ امماریخ	Speaker Type 2W, 4Ω (x2) Video HDMI, VGA, Audio Socket (3.5mm), BNC (AV) Control RS-232 Power Consumption (W) 41 Input Voltage AC110~240V (50Hz~60Hz) Unit Size (WxHxD mm) 716.2x415.05x45.95	HDMI, VGA, Audio Socket (3.5mm), BNC (AV)		
AV Inputs	Control	1920x1080 698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110-240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)		
D	Power Consumption (W)	1920x1080 698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110-240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual		
Power	Input Voltage			
	Control RS-232 Power Consumption (W) 41 Input Voltage AC110~240V (50Hz~60Hz) Jnit Size (WxHxD mm) 716.2x415.05x45.95 Package Size (WxHxD mm) 870x575x175			
	Package Size (WxHxD mm)	870x575x175		
Mechanical	VESA Holes (mm)	400x200 M6		
	Net Weight (kg)	698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110-240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual		
	Gross Weight (kg)			
	Operating Temperature	698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110~240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual		
Environmental	Storage Temperature	-10°C to 55°C		
Environmentai	Operating Humidity	10% to 80%		
	Storage Humidity	0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110-240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)		
Computor	Media Formats	Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)		
Computer	Media Resolution	698.4x392.85 Top/left/right: 7.1, Bottom: 11.6 0.12125x0.36375 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110~240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual		
Associas	Included	Remote Control, User Manual		
Accessories	Optional	16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 41 AC110~240V (50Hz~60Hz) 716.2x415.05x45.95 870x575x175 400x200 M6 8.46 10.79 0°C to 40°C -10°C to 55°C 10% to 80% 10% to 90% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual		
Marranty	Warranty Period	3 Year Warranty		
Warranty	Technical Support	Lifetime		

Errors and omissions excepted

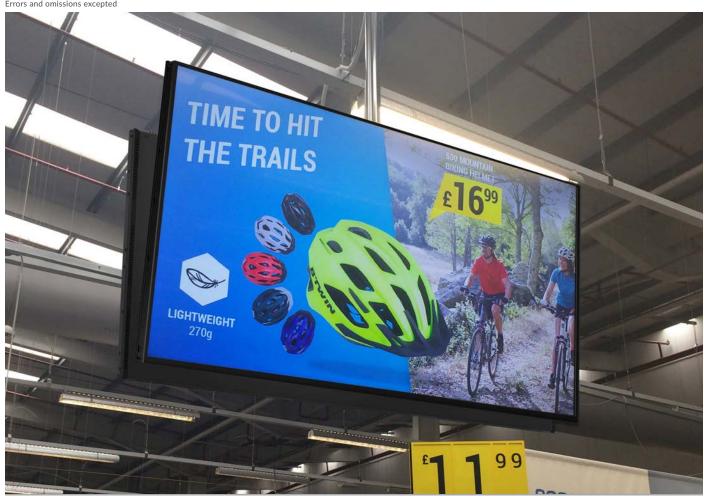

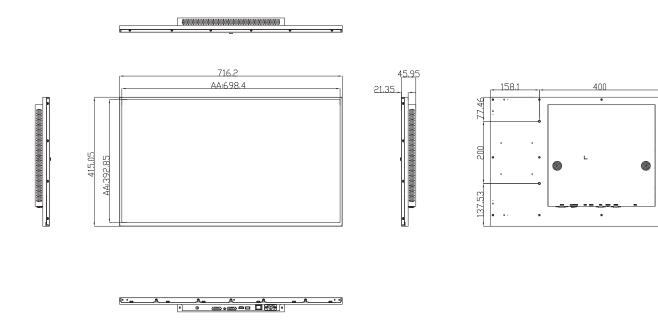

158.1



From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support


If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.



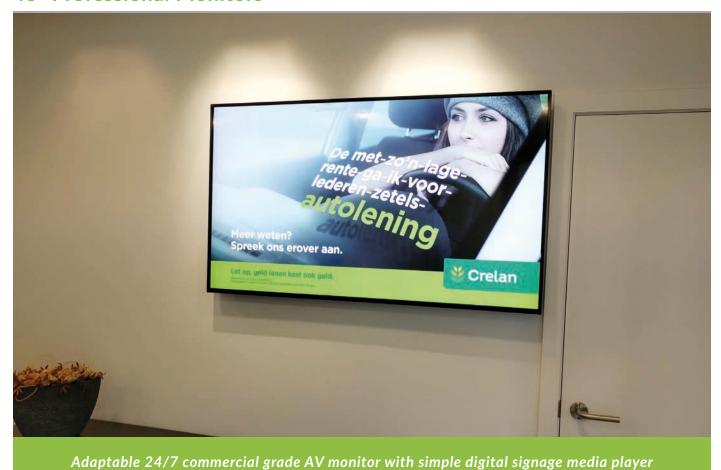

Budget Friendly Professional Displays

These displays are designed to be a cost effective 24/7 commercial display solution. If your application calls for a commercial screen and budget is a major factor these displays are perfect.





24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.





450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.






Narrow Bezel



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.

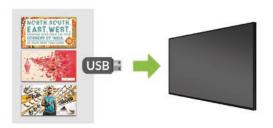


Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

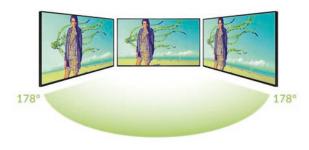

BNC Connection

Ideal for CCTV monitor applications our monitors have a BNC input for AV connections. The monitor is able to display video directly from CCTV cameras or from a Digital Video Recorder.




Built-in Video Matrix Processor

Automatically tile an external signal without the need for an expensive matrix box, creating a budget-friendly video wall solution.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.




Connect Devices

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.

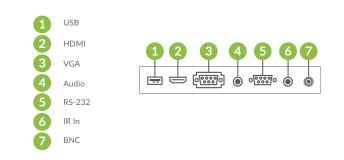

RS-232 Control and IR Extension

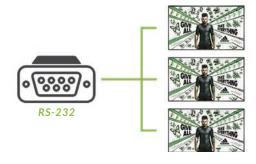















		43 Inch
	Resolution	1920x1080
	Display Area (mm)	941.2x529.4
	Bezel Size (mm)	Top/left/right: 11.2, Bottom: 17.3
	Pixel Pitch	0.49x0.49
Panel	Aspect Ratio	16:9
	Brightness (cd/m²)	450
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1200:1
Audio	Speaker Type	2W, 8Ω (x2)
۸\/ اممریاد	Video	HDMI, VGA, Audio Socket (3.5mm), BNC (AV)
AV IIIputs	Control	RS-232
Dower	Power Consumption (W)	45
Power	Input Voltage	AC100~240V (50Hz~60Hz)
	Unit Size (WxHxD mm)	963.6x557.9x48.1
	Package Size (WxHxD mm)	1060x650x160
Display Area (mm)	400x200 M6	
	Net Weight (kg)	11.65
	Gross Weight (kg)	15.5
	Operating Temperature	0 °C to 40 °C
Environmental	Storage Temperature	-10°C to 55°C
Liiviioiiiileiitai	Operating Humidity	10% to 80%
	Storage Humidity	10% to 90%
Computor	Media Formats	Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)
Computer	Media Resolution	1920x1080/1080x1920
Accossorios	Included	Remote Control, User Manual
-ccessories	Optional	RS-232 45 AC100~240V (50Hz~60Hz) 963.6x557.9x48.1 1060x650x160 400x200 M6 11.65 15.5 0 °C to 40 °C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand 3 Year Warranty
Warranty	Warranty Period	3 Year Warranty
rvarranty	Technical Support	Lifetime

Errors and omissions excepted

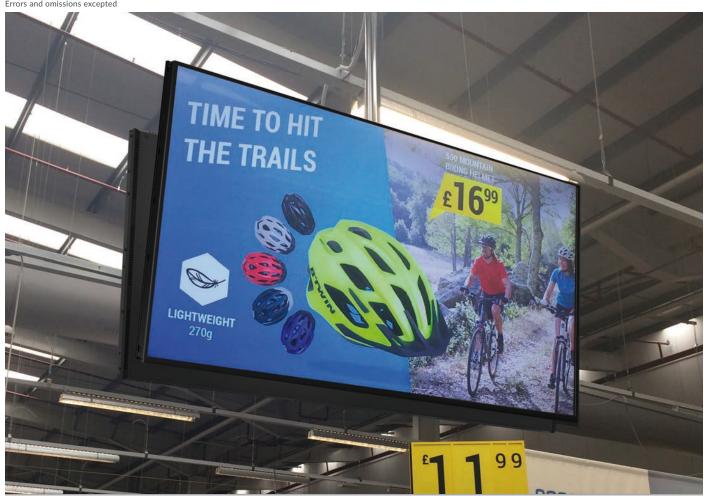

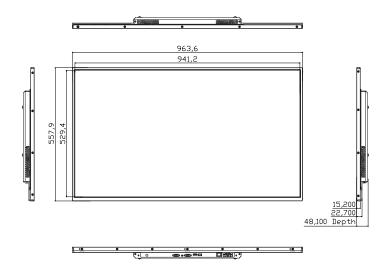

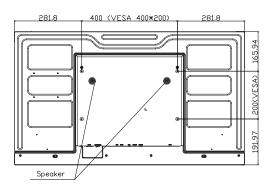



From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support


If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.



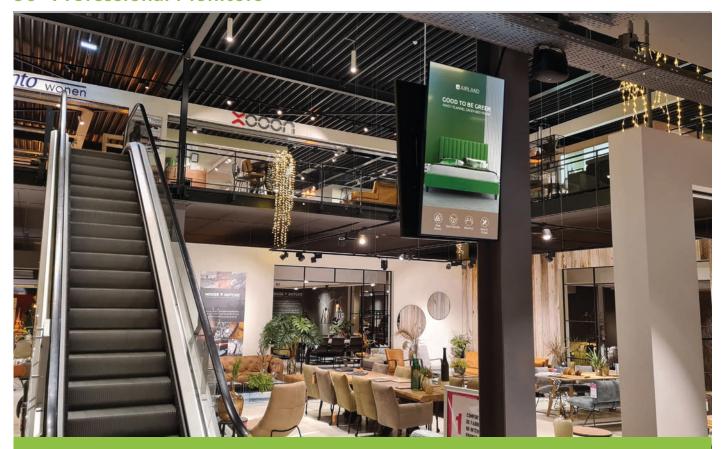

Adaptable 24/7 commercial grade AV monitor with simple digital signage media player

Budget Friendly Professional Displays

These displays are designed to be a cost effective 24/7 commercial display solution. If your application calls for a commercial screen and budget is a major factor these displays are perfect.





450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.





24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.






Narrow Bezel



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.

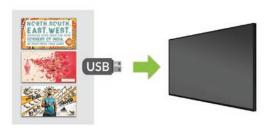


Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

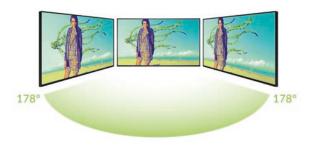

BNC Connection

Ideal for CCTV monitor applications our monitors have a BNC input for AV connections. The monitor is able to display video directly from CCTV cameras or from a Digital Video Recorder.



Built-in Video Matrix Processor

Automatically tile an external signal without the need for an expensive matrix box, creating a budget-friendly video wall solution.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.




Connect Devices

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.

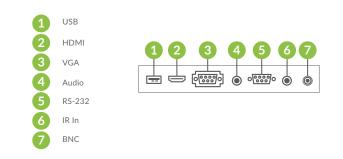


RS-232 Control and IR Extension

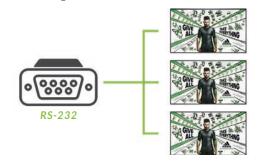















		50 Inch				
	Resolution	1920x1080				
	Display Area (mm)	1073.8x604				
	Bezel Size (mm)	5.9				
D 1	Aspect Ratio	16:9				
Panel	Display Area (mm) 1073.8x604	450				
		16.7M				
	Viewing Angle	178°				
	Contrast Ratio	1200:1				
Audio	Speaker Type	2W, 4Ω (x2)				
	Video	HDMI, VGA, Audio Socket (3.5mm), BNC (AV)				
AV Inputs	Control	RS-232				
	Power Consumption (W)	1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 88 AC110~240V (50Hz~60Hz) 1090.4x621.3x56.9 1241x764x193.7 400x400/400x200 M6 18				
Power	Input Voltage	AC110~240V (50Hz~60Hz)				
	Unit Size (WxHxD mm)	1090.4x621.3x56.9				
	Package Size (WxHxD mm)	1241x764x193.7				
Mechanical	VESA Holes (mm)	400x400/400x200 M6				
	Net Weight (kg)	18				
	Gross Weight (kg)	22				
	Operating Temperature	RS-232 88 AC110~240V (50Hz~60Hz) 1090.4x621.3x56.9 1241x764x193.7 400x400/400x200 M6 18 22 0°C to 40°C -10°C to 55°C 10% to 80% 10% to 90%				
For the control of	Storage Temperature	-10°C to 55°C				
Environmentai	Operating Humidity	10% to 80%				
	Storage Humidity	10% to 90%				
	Media Formats	Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)				
Computer	Media Resolution	1920x1080/1080x1920				
Ai	Included	400x400/400x200 M6 18 22 0°C to 40°C -10°C to 55°C 10% to 80% 10% to 90% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual				
Accessories	Optional	Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand				
\\/a=====+=	Warranty Period	3 Year Warranty				
Warranty	Technical Support	Lifetime				



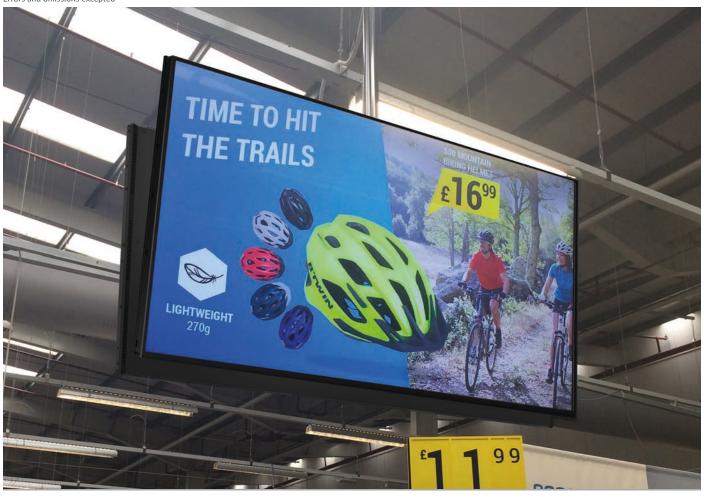

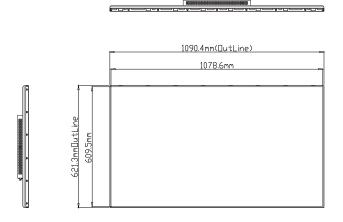



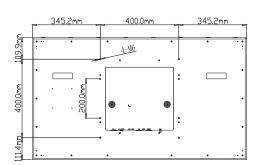





From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support

If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.





Adaptable 24/7 commercial grade AV monitor with simple digital signage media player

Budget Friendly Professional Displays

These displays are designed to be a cost effective 24/7 commercial display solution. If your application calls for a commercial screen and budget is a major factor these displays are perfect.





450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.





24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.






Narrow Bezel



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.

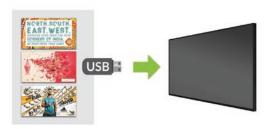


Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

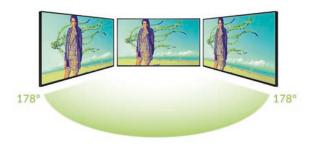

BNC Connection

Ideal for CCTV monitor applications our monitors have a BNC input for AV connections. The monitor is able to display video directly from CCTV cameras or from a Digital Video Recorder.



Built-in Video Matrix Processor

Automatically tile an external signal without the need for an expensive matrix box, creating a budget-friendly video wall solution.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.




Connect Devices

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.

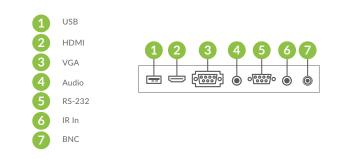


RS-232 Control and IR Extension

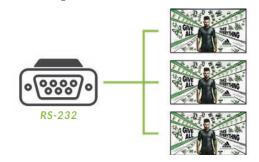














		55 Inch		
	Resolution	1920x1080		
	Display Area (mm)	1214.2x685		
	Bezel Size (mm)	Top/left/right: 8.9, Bottom: 15		
Panel	Pixel Pitch	0.315x0.315		
	Aspect Ratio	16:9		
	Brightness (cd/m²)	450		
	Colour	16.7M		
	Viewing Angle	178°		
	Contrast Ratio	1200:1		
Audio	Speaker Type	2W, 4Ω (x2)		
A) / In contra	Video	HDMI, VGA, Audio Socket (3.5mm), BNC (AV)		
AV Inputs	Control	Top/left/right: 8.9, Bottom: 15 0.315x0.315 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 98 AC110~240V (50Hz~60Hz) 1232x708.9x50.4 1365x815.4x186 400x200 M6 19.45 24.6 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920		
D	Power Consumption (W)	1920x1080 1214.2x685 Top/left/right: 8.9, Bottom: 15 0.315x0.315 16:9 450 16.7M 178° 1200:1 2W, 4Ω (x2) HDMI, VGA, Audio Socket (3.5mm), BNC (AV) RS-232 98 AC110-240V (50Hz~60Hz) 1232x708.9x50.4 1365x815.4x186 400x200 M6 19.45 24.6 0°C to 40°C -10°C to 55°C 10% to 80% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP) 1920x1080/1080x1920 Remote Control, User Manual Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand		
Power	Input Voltage			
	Unit Size (WxHxD mm)	1232x708.9x50.4		
	Package Size (WxHxD mm)	1365x815.4x186		
Mechanical	VESA Holes (mm)	400x200 M6		
	Net Weight (kg)	19.45		
	Gross Weight (kg)	24.6		
	Operating Temperature	0°C to 40°C		
Facility and sandal	Storage Temperature	-10°C to 55°C		
Environmental	Operating Humidity	10% to 80%		
	Storage Humidity	10% to 90%		
C	Media Formats	Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)		
Computer	Media Resolution	0°C to 40°C -10°C to 55°C 10% to 80% 10% to 90% Video (AVI, MP4), Audio (MP3), Image (JPG, BMP)		
A	Included	Remote Control, User Manual		
Accessories	Optional	Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand		
144	Warranty Period	3 Year Warranty		
Warranty	Technical Support	Lifetime		

Errors and omissions excepted

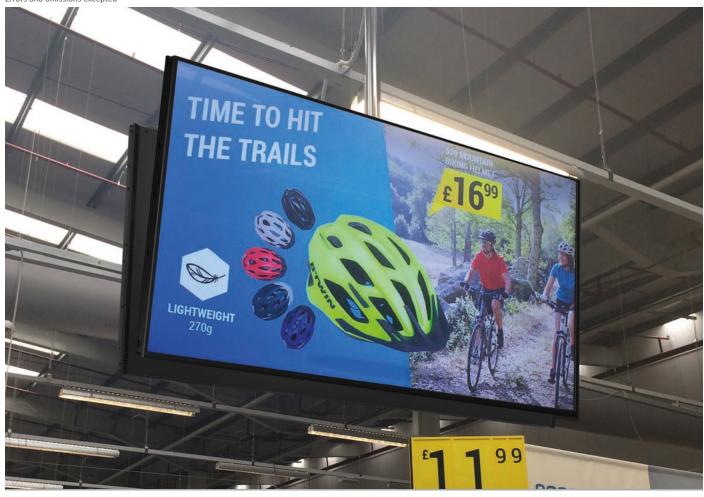

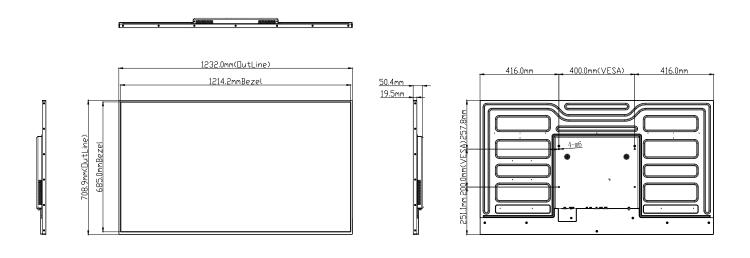

• •		•	•	•	•	• •
	•••	@·@*5				
0010		4500			0010	



From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support

If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.

